

Product Data Sheet

Knauf Intumescent and Acoustic Mastic



Knauf Intumescent and Acoustic Mastic is a water based, acrylic expanding fire resistant sealer, designed specifically for linear joint sealing, provides noise reduction capabilities and helps with acoustic separation in partitions.

Areas of Application

For use in liner joints, excellent adhesion to most common building substrates.

Compliance Standards

BS EN 1366-3 with additional guidelines from BS EN 1366-4 for fire protection joints and testing in accordance with BS EN ISO 140-3:1995 for acoustic performance.

Key Benefits

- Provides a perimeter seal to Fire Rated Systems
- No priming required for most construction substrates
- Joint movement capability of 7.5%
- Excellent slump resistance
- Fast cure - tack free within an hour
- Easy to apply and tool off
- Halogen free
- Paintable
- Reduces sound transmission in joints

Performance Data

Reaction to Fire	Tensile Properties	Elastic Recovery	Dangerous Substances	Adhesion	Durability	Impact Sound Insulation	Airborne sound insulation
Class F	Elongation at break $\geq 100\%$ @23°C, M2 Mortar	7.5% Elongation 33% recovery, M2 Mortar	No release of dangerous substances	No failure, M2 Mortar	Z ²	NPD	NPD

Technical Information

Dimensions and Weights									
Size (ml)	Form	Specific Gravity	Flash point	Tack Free	Skin Formation	Flexibility (%) (ISO 11600)	Compatibility	Colour	Material Number
310	Ready to use thixotropic paste	1.60 - 1.64	None	Max. 60 mins.	Max. 20 mins.	7.5	Suitable for use with most materials, but should not be used in direct contact with bituminous materials.	Blue	258281
600									258280

Sustainability

Recyclability

Not recyclable

Substances of very high Concern (SVHC)

At the time of publication, under REACH UK and REACH EU regulations this product contains no SVHC. For more information please consult the Safety Data Sheet.

Volatile Organic Compound Content (VOC)

TVOC – 14µg/m³ emission rate after 3 days

TVOC – <5µg/m³ after 4 weeks

TSVOC – <5µg/m³ emission rate after 3 days

TSVOC – <5µg/m³ emission rate after 4 weeks

Storage and Handling

Store between 10°C and 30°C.

Packaging

310ml plastic cartridge and 600ml foil tubes.

Shelf Life/Service Life

18 months stored un-opened. In temperatures between 10°C and 30°C.

Disposal

Disposal should be in accordance with local authority requirements.

Health & Safety

Please refer to our Safety Data Sheet for guidance on Personal Protection Equipment required for the handling and installation of this product.

Application / Installation


In conjunction with Plasterboard, a bead of Knauf Intumescent and Acoustic Mastic is required to the plasterboard perimeter edges and at abutment studs to maintain fire/acoustic resistance seal to the structure. Two continuous 6mm beads of Knauf Intumescent and Acoustic Mastic should be installed underneath the floor channel (Knauf U Channel), between the head channel and plasterboard fillets and between the plasterboard fillets and the soffit.

Additional Documentation

[Declaration of Performance UKCA](#)

[Declaration of Performance CE](#)

[Safety Data Sheet](#)

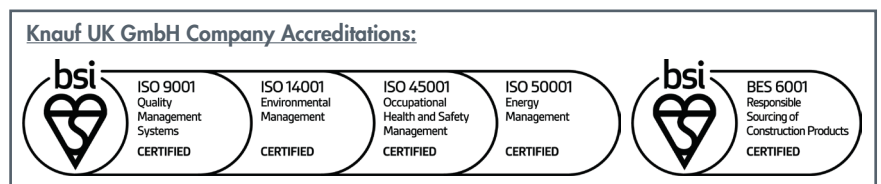

Customer Service

UK Tel: 0800 521 050
Eire Tel: 01 4620739
Email: cservice@knauf.com

Technical Service

0800 521050 (option 2)
Live Webchat 09:00 -17:00
technical-uk@knauf.com

Website

www.knauf.co.uk
www.knauf.ie

Address

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

KML100441

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued.

© Copyright Knauf 2023

Creation Date: 30/08/2023
Revision Reference: 001
Revision Date: 30/08/2023

Build for the world we live in